

PWM SSR MODULE [PAAI-SSR-3CH-REV1]

Feature




- Higher load capacity up to 200W each channel
- High speed PWM Opto- Isolated Input up to 1.5KHz.
- Max. Output Channel: 3 channels
- Din- rail Plastic Housing.
- Suitable for indoor environments.

Main Characteristics

- Input interface: PWM up to 1.5 KHZ
@ 12VDC to 24V DC.
- Input Voltage: 12VDC - 24Vdc
- Output: NPN PWM.
- Mounting: DIN – Rail
- Working Temperature: -30°C~55°C
- Product Size: L100×W90×H55(mm)
- Weight (G.W.): 120 g



Dimensions:

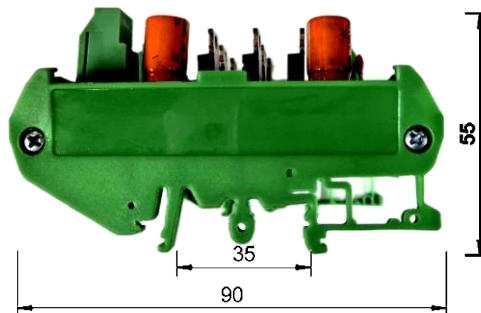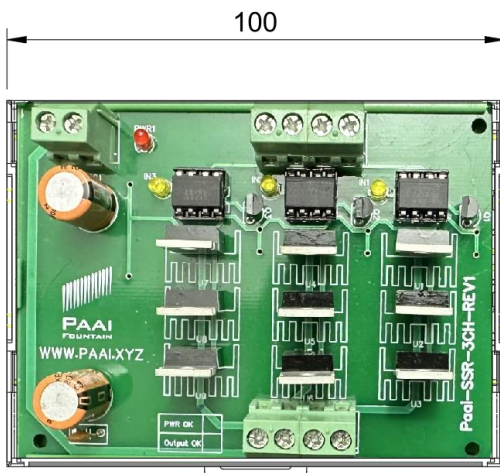

DIN Rail Mounting Size:
TS-35/7.5 or TS-35/15

Country of origin: India

Paai Imagineering Pvt Ltd

Email: sales@paai.xyz


Contact no: +91 95583 27573

Web: www.paai.xyz



PWM SSR MODULE [PAAI-SSR-3CH-REV1]

Wiring Diagram:

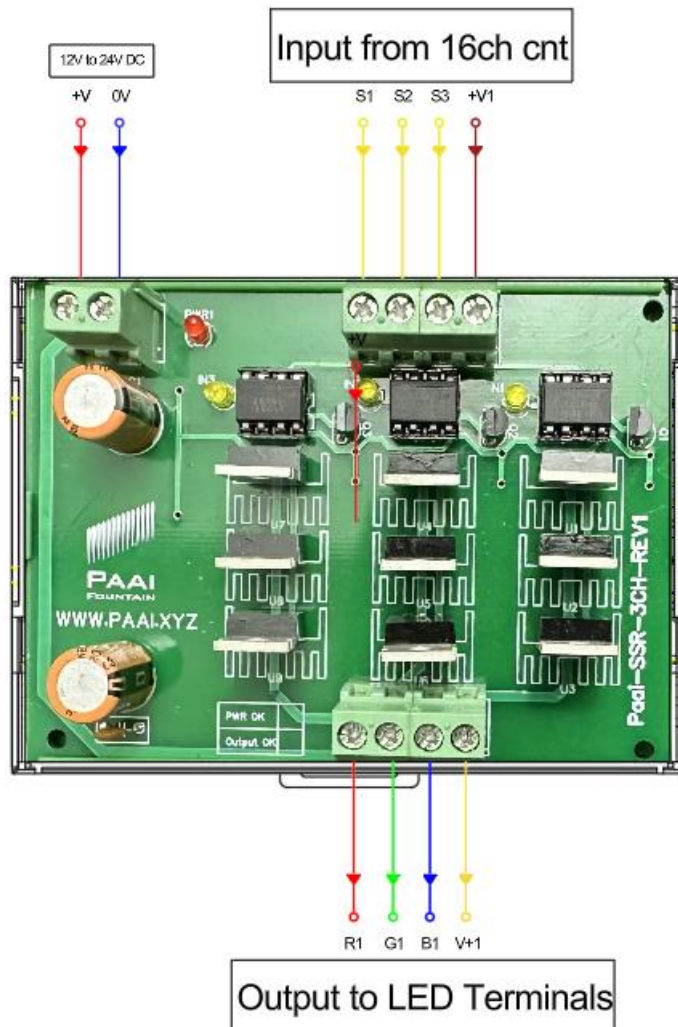

Paai Imagineering Pvt Ltd

Email: sales@paai.xyz

Contact no: +91 95583 27573

Web: www.paai.xyz

